


Thin-Clad Veneer Face Sealed Installation Guide (CMU or Concrete Substrate)

Step 1: Inspect Concrete Walls

The substrate can be comprised of poured-in place concrete or concrete block (CMU). Ensure these walls are plumb prior to installation. Ensure these substrates are free of dust and debris. Deflection criteria for substrate should be $L/600$ ($L/720$ preferred).

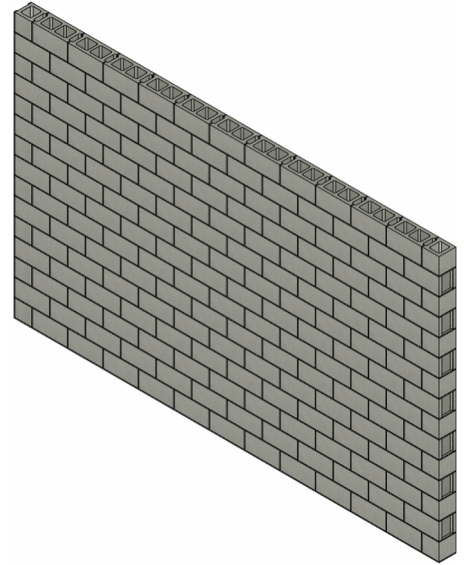


Step 2: Install Air & Water Barrier

Apply the required number of coats of ProGUARD DP® Water Armor Air and Water Barrier (Vapor Permeable) or Water Armor VB (Vapor Retarder/Barrier) over the entire surface of the concrete substrate. Follow T.Clear's instructions for proper application and number of coats.

or


Apply the required number of coats of Laticrete Air and Water Barrier (Vapor Retarder) or Laticrete Air Barrier C3 (Vapor Permeable) over the entire surface of the concrete substrate. Follow Laticrete's instructions for proper application and number of coats.

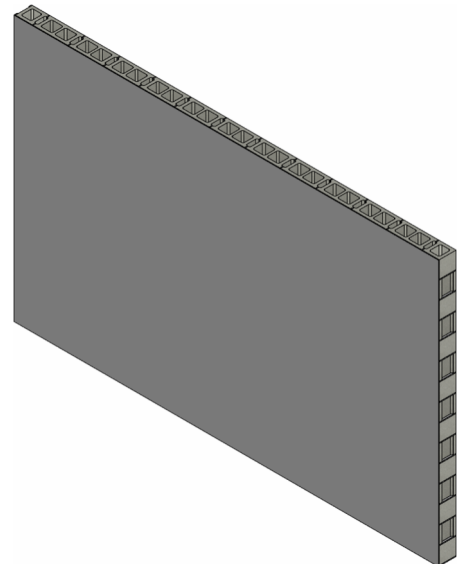

Step 3: Adhered Veneer Substrate Preparation

Ensure installed waterproofing over concrete surface is free of dust and debris. Using a notched trowel, spread T.Clear Total Bond or Laticrete Bonding Mortar across waterproofing and ensuring to burn the mortar into the substrate surface. Pull the notched side of the trowel across mortar to create a grooved surface and to gauge the mortar thickness. Notched trowel selection is dependent on the material being installed and the substrate tolerances. Apply only a workable area of mortar that will allow stone/brick/masonry to be properly set before surface drying occurs. This area will vary depending on site environmental conditions.

NOTE: Do not substitute T.Clear Total Bond or Laticrete Bonding Mortars with any other products or materials unless Arriscraft Technical Services has been consulted.

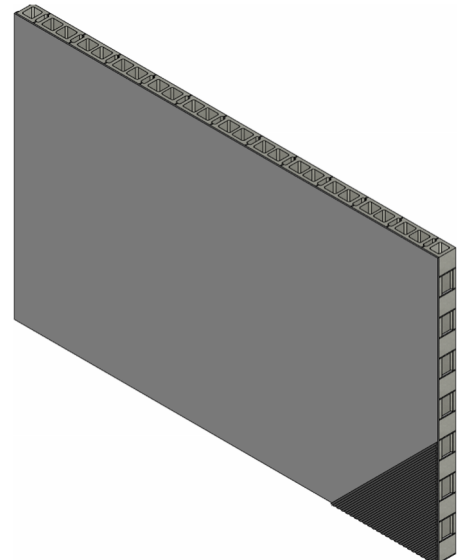


Thin-Clad Veneer Face Sealed Installation Guide (CMU or Concrete Substrate)

Step 4: Prepare Thin Adhered Masonry Veneer

Clean unit backs of any dust, laitance, loose material and any excess film that could impede bond. "Back-butter" the thin-adhered units with T.Clear Total Bond or Laticrete Bonding Mortar, ensuring to burn the mortar into the back of the units and filling any surface irregularities. Pull notched side of the trowel across mortar to create a grooved surface and to gauge the mortar thickness. Notched trowel selection is dependent on the material being installed and the tolerances of the substrate. Be sure to achieve 100% coverage with the mortar.

NOTE: Do not substitute T.Clear Total Bond or Laticrete Bonding Mortars with any other products or materials unless Arriscraft Technical Services has been consulted.

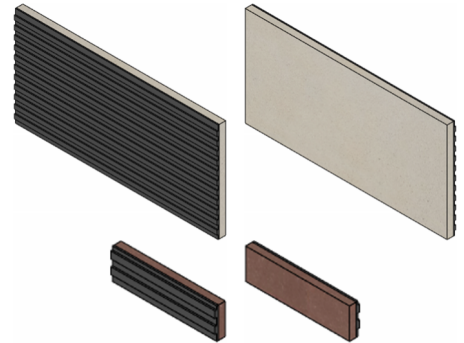


Step 12: Install Thin Adhered Masonry Veneer

Begin with the corner pieces and bring the two still wet mortar surfaces together (back buttered units and mortar on the wall as this is in part what creates the incredible bond strengths). Press the corner piece onto the wall, rotating back and forth slightly. This process should force some of the mortar to "squeeze out" and work out any air gaps in the mortar. Remove any excess mortar with a square flat trowel and use the excess on the next piece of thin-adhered masonry.

After the corner pieces are installed, apply flat stretcher pieces starting at an outside corner unit and working your way in. Set the stretcher units by placing it on the ledger, steel flashing/panel support, or the units that were installed below. Once set on the wall push the unit into the mortar and up and at an angle and then return it back to the desired position. This process should force some of the mortar to "squeeze out" and work out any air gaps in the mortar. Remove any excess mortar with a square flat trowel and use the excess on the next unit. Remove excess mortar droppings from the veneer face with a clean wet sponge and a stiff fibre brush. Check for 100% mortar coverage by removing ten brick units, 4 ARRIS-tile, natural stone, or porcelain tile units, 8 manufactured stone units from the wall per bag of mortar used to check that no voids exist. Reinstall removed units.

Once the bonding mortar has cured then use Laticrete Pointing Mortar or a Type "N" mortar to point the joints between the individual units as required. Place pointing mortar into a grout bag or grout gun and squeeze the grout into the joints between the thin-adhered masonry units. Once the mortar is thumbprint hard, tool the joints to a concave or raked finish depending on the desired joint finish ensuring to push the mortar into the joint during this process to force the mortar against the adhered veneer units. Allow the wall to cure.

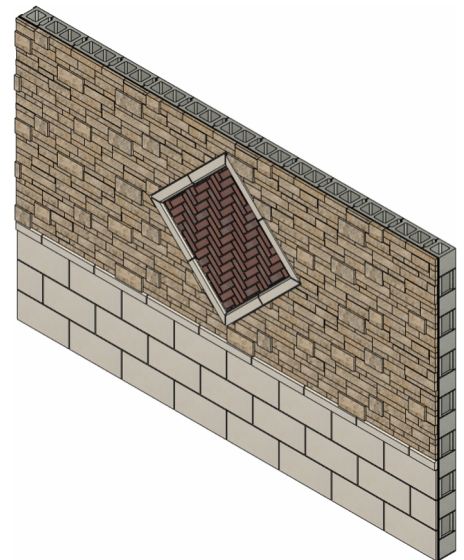

Thin-Clad Veneer Face Sealed Installation Guide (CMU or Concrete Substrate)

Checklist for Placing a Face Sealed Order			
When Installing Thin-Clad Veneer over CMU or Concrete Substrates			
Materials Required		Approximate Coverage/Size (if applicable)	Notes
<input type="checkbox"/>	Water Armor LF	16 lin. ft.	Can be used as flashing in combination with Water Armor waterproofing.
	or ProGUARD <i>DP</i> ® Water Armor Flashing Tape	180 lin. ft.	
	or Laticrete Flashing Sealant	16 lin. ft.	Can be used as flashing in combination with Laticrete waterproofing.
	or Laticrete Waterproofing Anti-Fracture Fabric	75 lin. ft.	
<input type="checkbox"/>	Water Armor Air and Water Barrier (Air and Water Barrier that is Vapor Permeable with a perm rating of 30)	500 sq. ft. with 1 coat required	
	or Water Armor VB (Vapor Barrier with a perm rating of 0.07)	250 sq. ft. with 2 coats required	
	or Laticrete Air and Water Barrier (Air and Water Barrier that is a Vapor Retarder with a perm rating of 0.157)	250 sq. ft. with 2 coats required	
	or Laticrete Air Barrier C3 (Air and Water Barrier that is Vapor Permeable with a perm rating of 3.0)	500 sq. ft. with 1 coat required	
<input type="checkbox"/>	Thin Masonry Veneer Material (stretchers, corners, custom profiles)	Dependent on selected material	
<input type="checkbox"/>	T.Clear Total Bond for all masonry options	25 sq. ft.	
	or Laticrete Bonding Mortar (select appropriate one):		
	1) Laticrete Hi-Bond Veneer Mortar for ARRIS-tile, Porcelain tile, ceramic tile, natural stone tile, or	25 sq. ft.	
	2) Laticrete Masonry Veneer Mortar for manufactured stone and thin natural building stone, or	25 sq. ft.	
	3) Laticrete Thin Brick Mortar for thin brick, Midtown, Coastal and stack	25 sq. ft.	
<input type="checkbox"/>	Shims (to help with proper install and keep stone and joints level as material is installed and to maintain joint spacing):	Order shim thickness that is appropriate for the joint widths for the masonry material being installed.	
	1) 1/16" (100 per bag)	Exception to that rule, we recommend 1/16" and 1/8" shims be used with Stack and Midtown when installing them with tight joints.	
	2) 1/8" (100 per bag)		
	3) 1/4" (100 per bag)		
4) 3/8" (20 per bag)			
<input type="checkbox"/>	Laticrete Pointing Mortar or Type N mortar to point the joints (if required)	Dependent on selected material	
<input type="checkbox"/>	Laticrete Latacil or Dowsil Silicone Sealant for sealing movement joints and joints around openings such as windows and doors, as well as penetrations like pipes and fittings etc...	Dependent on Joint width to be sealed	Don't forget backer rod in the joint prior to installing the silicone